

JANOME BULLETIN

Serious free-motion quilting accessories for serious quilters

The JANOME 1600P series of high-speed straight stitch machines has been lauded by quilters for their speed and beautiful straight stitch. JANOME has developed two new and exciting free-motion quilting presser foot sets to complement the 1600P QC which was recently released with additional quilter and quilting frame friendly features.


Convertible Free-Motion Quilting Foot Set for 1600P Series

Part No: 767 433 004
(Blister Packed)

Now available!

The industrial shank version of the popular convertible free-motion foot set released last year, this set includes foot holder, open toe and closed toe feet and a darning plate for table top free-motion quilting.

- Point 1: Streamlined foot for improved visibility.
- Point 2: Reduced vibration and professional-level durability.
- Point 3: Interchangeable feet to maximize utility.

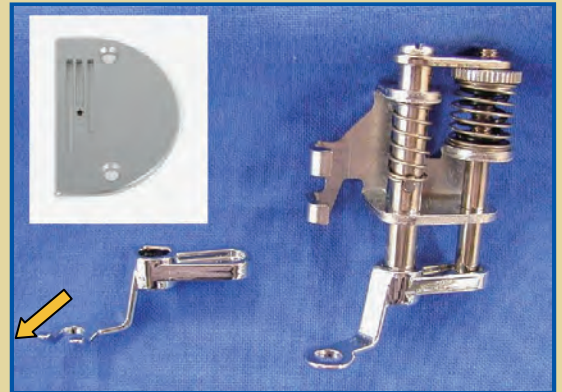

Open-toe foot:
Opening faces FORWARD for table-top sewing.

Convertible Free-Motion Frame Quilting Feet for 1600P Series

Part No: 767 434 005
(Blister Packed)

NEW!



This set includes 1/4 inch Ruler Foot and Open-toe Frame Quilting Foot which are designed specifically for frame quilting, the forte of the new 1600P QC.

1/4 inch Ruler Foot:

Back of foot has high 'heel' and 1/2" diameter for free-motion quilting with 1/4" thick quilt rulers and long-arm quilting templates

Open-toe Frame Quilting Foot:

Opening faces SIDEWAYS to face quilter at handles of quilt frame.



Professional free-motion quilting tip

When free-motion quilting with the 1600 series, including when mounted on a quilt frame, you may want to lower the tension of the bobbin holder in addition to adjusting the upper tension. Before lowering the tension, use a tiny drop of nail polish or correction fluid to mark the original position of the screw on the holder. As tension needs will change depending on threads, fabrics and batting, do as many tests as needed before actually quilting your quilt top.

