

Quilt Maker

Memory Craft 15000

3. 1/4" Seam Foot (without guide) (0)

The recently developed 1/4" Seam Foot with no guide plate attached is a very useful tool for various types of piecing work.

As with the 1/4" seam foot, you can sew the 1/4" position by aligning the cloth with the edge of the presser foot.

Fabric can be fed stably using the wide area of the foot. Made of metal, the foot is durable and strong.




Point 1 No guide plate

You can sew smoothly without the guide plate getting caught at the part where the seam allowance of the piecing overlaps.



No guide O foot: smoothly sew the overlapping seam allowance parts.

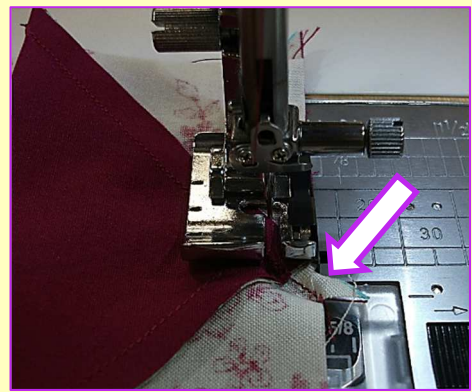


Normal O foot: Seam allowance can get caught in guide plate.

Point 2 1/4" guide on left side of needle drop as well

Because you can sew two lines from the same direction using the guide, the fabric stays flat and good results can be achieved every time.


Good for Flying Geese or Half Square Triangle Piecing!

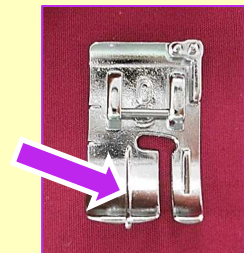

Align edge of foot with the mark and sew.



Match the 1/4" guide line with the mark and sew. As the guide line is raised, it is easy to align with the mark.

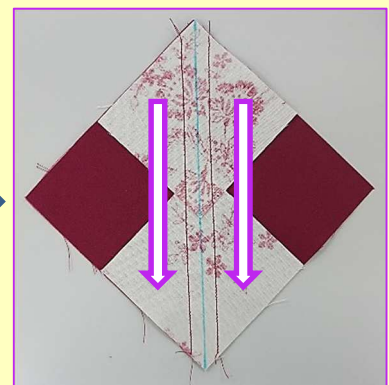

As you can sew from the same direction, the fabric stays flatter.


2017/8/7
JTM-1035

JANOME


3. 1/4" Seam Foot (without guide) (O)

Point 3 Markings on the foot in front and behind the needle drop position


Markings are very helpful for leaving a 1/4" seam allowance. Match the fabric edge to the marking and you can measure 1/4" accurately without using a washable marker.

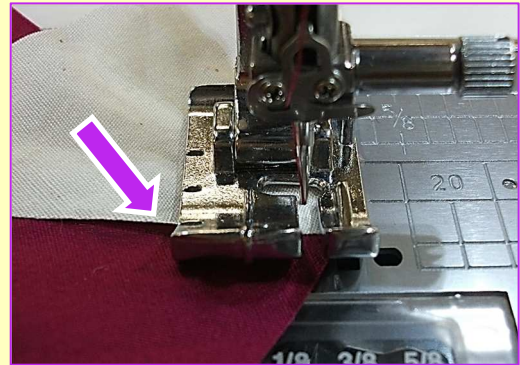

*These markings are good for fine piecing like Lemon Stars.

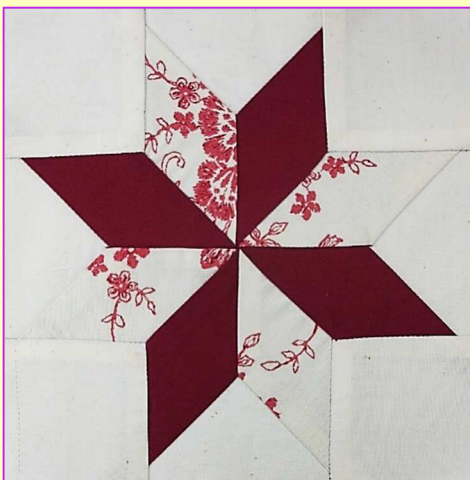

Right side

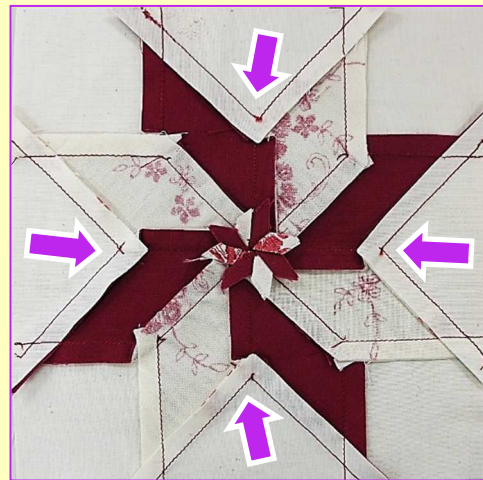

Wrong side

Point 4 For sewing many pieces of the same length, the 1/4" Seam Foot (O) and the Patchwork page in Sewing Applications are very convenient



The Patchwork page has a memory function for piecing length. Sew a piecing piece at your preferred length and then select the 'OK' option. The sewing machine will then automatically stop at the memorized length when sewing the next piece.

