

Customizer 11000 Version 1.50 Update Installation Instructions

Please review the following before downloading: (Installation checklist)

Use the following as a checklist of all necessary steps to follow when installing and configuring your new Customizer 11000 software.

1. Read through all necessary installation steps carefully before getting started.
2. Close all Windows programs but leave Windows running.

Installing Customizer 11000 Version 1.50 Update

Use the procedure outlined below to update Customizer 11000 software on your computer.

1. Click on the link of the website to download the update file.

**Click Here to Download
Customizer 11000 Update
Version 1.50**

2. When your browser prompts you for a path, navigate to your desktop and click OK.
3. When the download is complete, minimize your browser.

4. Look for this icon on your desktop and double click on the icon in order to install the update to your computer.



5. Follow the instructions to complete the update.

For Windows 7 (32-bit and 64-bit) and 64-bit PC users:


1. Log on to your computer as Administrator or a user with administrator privileges.

End all applications before beginning.

2. When the update has completed, click on the shortcut icon of Customizer 11000 to open the start screen.



3. Select MC11000 under the Customizer 11000 and click **Driver Install**.

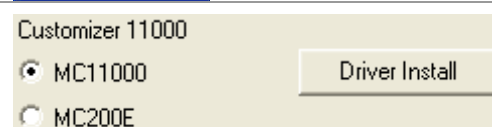

4. Double click the Jsmc860Installer shortcut.



5. The User Account Control will display.


→ Click **Yes**.

6. The **Device Driver Installation Wizard** will start up.

→ Click **Next**.



7. Installation will begin.

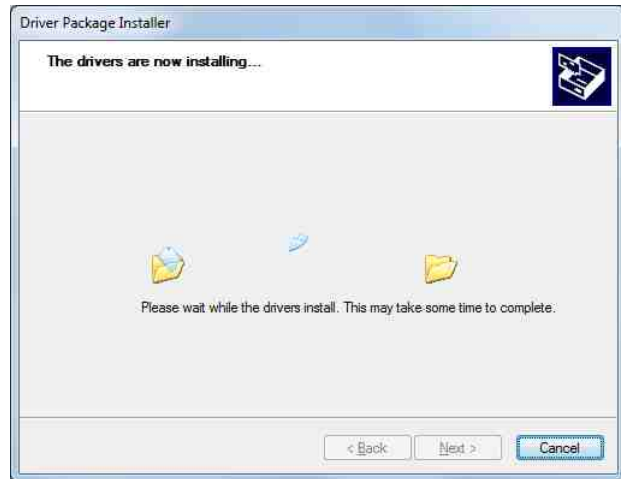

8. During installation, a **Windows Security** message will display.

→ Select **Install this driver software anyway**.



• On 64-bit systems, the following message will display.



→ Select **Install**.

9. The installation complete window will display.

→ Click **Finish** to close the dialog.



10. Connect the sewing machine to the computer with the USB cable and turn the power switch of the sewing machine ON.

11. The computer will automatically begin searching for the driver...



12. ...and install the driver.

